LADDER INSPECTION CHECKLIST

Workplace Location	Date of Inspection	Inspected By

Inspection Criteria	Ladder Identification Number				
Inspection Criteria					
General	Mark each box with ✓ if satisfactory or an × if action is required				
All information labels and duty ratings are legible?					
Steps are secure and not loose-fitting?					
Steps are not damaged or slippery?					
There are plus plits in steps, rungs, stiles or rails?					
There a no damage or missing parts with stiles or rails?					



SAMPLE

SUBSCRIBE NOW AND GET FULL ACCESS

© HSEQ-MF-153 Version: 1.0 Insert Date Page 1 of 2

Information That Should Be Marked on a Ladder


- The Compliance label.
- The maximum load rating of the ladder in kilograms. (Must have a maximum load rating of at least 120kg for industrial use).
- In the largest lettering practicable, the duty rating e.g. the words 'INDUSTRIAL USE.
- If the ladder is not designed for electrical type work (i.e. conductive ladders) in the largest lettering practicable, the words 'DO NOT USE WHERE ELECTRICAL HAZARDS EXIST'.
- On double-sided step ladders, the words 'TO BE USED IN THE FULLY OPEN POSITION ONLY').

• The your adders the ladder (inclusive of the closed and maximum working lengths for extension type adders).



SAMPLE

SUBSCRIBE NOW AND GET FULL ACCESS

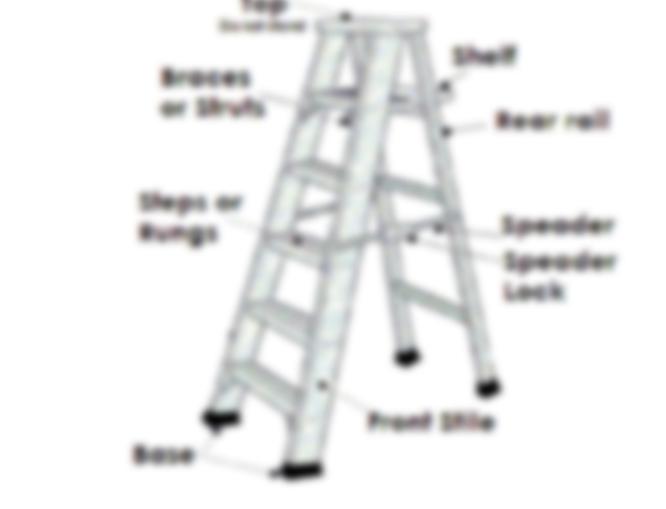

© HSEQ-MF-153 Version: 1.0 Insert Date Page 2 of 2